

# SmartROC D60

DTH surface drill rig for quarrying and mining

SmartROC D60 hole diameter: 110–178 mm (4.3–7")





# Intelligent, tough and dependable

**The SmartROC D60 down-the-hole rig from Epiroc is an intelligent drilling solution. The core of the machine is built on a trusted and well-proven platform.**

The new efficient SmartROC D60 consistently delivers high-quality blast holes with accuracy and precision. It is loaded with smart features such as automated drilling and rod handling. The extra long feed option with 8 meter pipes makes it possible to drill 16 m production holes with just one rod-adding. All these features and flexibility are packed in a rig which is economical to run due to the intelligent control of the compressor and engine rpm. The SmartROC D60 also uses 300 liters less hydraulic oil than previous versions and features fewer hoses and pumps. This helps to further reduce costs and makes servicing easier, whilst increasing sustainability and reducing the environmental impact of the rig.

The SmartROC D60 is controlled via an advanced rig control system displayed on a touch screen inside the comfortable, air-conditioned FOPS and ROPS-certified cabin. It presents everything from drilling parameters to real-time Measure While Drilling data (MWD). A SmartROC rig from Epiroc can significantly raise quality across the whole operation.

A robust feed with in-built sensors means fewer breakdowns and more reliable rod handling.

## ⊕ Main benefits

**Intelligent, automated and future-proof** as a result of Epiroc's unique Smart technology

**Improved fuel consumption** due to the automatic control of compressor-load and engine rpm

**Efficient, productive and consistent** thanks to automated drilling and rod handling

The fully-automated drill cycle allows you to reach desired hole depth while drill tubes are added and extracted automatically.





Discover more about  
the SmartROC D60.

Semi automatic feed  
alignment system ensures  
that the hole angle is exactly  
as desired.

Smart options such as the  
Hole Navigation System  
(HNS) reduces your non-  
drilling time and improves  
precision.



**6<sup>th</sup> Sense**  
Smart. Safe. Seamless.

SmartROC D60 is a  
6<sup>th</sup> Sense product.

6<sup>th</sup> Sense is the Epiroc way  
of optimizing your value  
chain through automation,  
system integration and  
information management.



Scan to read more  
about 6<sup>th</sup> Sense



# An intelligent rig which you can count on to deliver.

The SmartROC D60 is built to face the toughest of conditions. It's loaded with intelligent features that will improve your operations, increase safety and boost productivity.

This rig is constantly evolving since its introduction in order to ensure that your investment delivers increased production and profitability shift-after-shift.



## + Increase drilling time with the extra long feed

The SmartROC D60 is available with an optional extra long feed (XLF). It carries 8 meter rods with a diameter of 89, 102, 114, 127 or 140 mm. The feed can also be easily adapted to take 6 meter rods if required. The XLF option means that the rig spends less time threading and unthreading rods. In addition, the drill string is extracted more rapidly. All this adds up to more holes drilled per shift which increases both production and profitability. In order to enhance stability, Rigs built with this option are also fitted with tracks placed further apart (wide kit).




## + Self-diagnostic capabilities

The SmartROC D60 is well-proven, tough and dependable. However, should a situation arise, the rig features an ingenious self-diagnostic system to help track down problems quickly and effectively to keep downtime to a minimum. SmartROC rigs are also designed to make life easier. The electrical system features a reduced number of cables for example – this reduces problems and makes troubleshooting much quicker.



## + Operate multiple rigs remotely

With the BenchREMOTE option, one person can safely control up to three rigs simultaneously from up to 100 meters away which dramatically increases operator productivity and takes safety to a whole new level. In combination with the Hole Navigation System (HNS), the BenchREMOTE removes the need for operators and surveyors to work in hazardous areas.

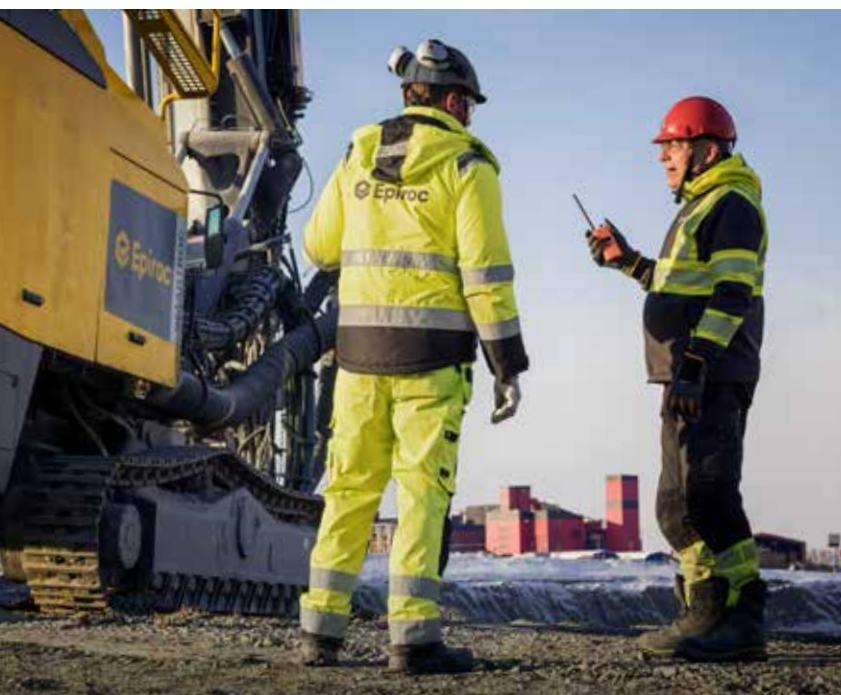

## A comprehensive service offering

Even the best equipment needs to be serviced regularly to make sure it sustains peak performance. An Epiroc service solution offers peace of mind, maximizing availability and performance throughout the lifetime of your equipment. We focus on safety, productivity and reliability.

By combining genuine parts and an Epiroc service from our certified technicians, we safeguard your productivity – wherever you are.

## Main components

- Crawler type two speed undercarriage with track oscillation system
- CAT C15 turbo-charged diesel engines with Tier 3 or Tier 4 Final/Stage V technology
- Atlas Copco screw-type high-pressure compressors
- ROPS and FOPS-approved operator cabin with rubber vibration dampers
- Aluminum profile feed beam
- Single-section boom system
- Toe hole drilling capability on standard feed version
- Carousel type tube handling system
- Break-out table with pressure regulating kit
- Hydraulic operated rotary head
- Electric pump for filling hydraulic oil

## Hole range & length (recommended)

		Metric	US
SmartROC D60	Hammer - COP 44 Gold, COP 54 Gold, COP 64 Gold	110-178 mm	4.33 - 7"
<b>Max hole length with hydraulic rod handling system and 5 m (16.4') rods (Standard Feed - SF)</b>			
SmartROC D60	Ø 89, 102, 114 mm (3.5", 4", 4.5") drill rods	45 m	148'
SmartROC D60	Ø 127, 140 mm (5", 5.5") drill rods	25 m	82'
<b>Max hole length with hydraulic rod handling system, 6 m (20') rods and a 7.5 m (24.6') starter rod (Long Feed - LF)</b>			
SmartROC D60	Ø 89, 102, 114 mm (3.5", 4", 4.5") drill rods	55.5 m	182'
SmartROC D60	Ø 127, 140 mm (5", 5.5") drill rods	31.5 m	103'
<b>Max hole length with hydraulic rod handling system, 8 m (26.2') rods (Extra Long Feed - XLF)</b>			
SmartROC D60	Ø 89, 102, 114 mm (3.5", 4", 4.5") drill rods	56 m	183.7'
SmartROC D60	Ø 127, 140 mm (5", 5.5") drill rods	40 m	181'
<b>Single pass drilling, max hole depth</b>			
SmartROC D60 standard feed	Ø 89, 102, 114 mm (3.5", 4", 4.5") drill rods	5.4 m	18'
SmartROC D60 long feed	Ø 127, 140 mm (5", 5.5") drill rods	7.5 m	24.6'
SmartROC D60 XL feed	Ø 127, 140 mm (5", 5.5") drill rods	8 m	26.3'

## Rotary head

	Connection thread	Max rpm	Max torque, drilling		Suitable for DTH-hammer
			Metric	US	
DHR6 H 45	API 2 3/8" REG, box	137	1 839 Nm	1 356 lbf	COP 44 Gold (COP 54 Gold)
DHR6 H 56	API 3 1/2" REG, box	107	2 353 Nm	1 735 lbf	COP 54 Gold, COP 64 Gold, COP M6
DHR6 H 68	API 3 1/2" REG, box	68	5 100 Nm	3 761 lbf	COP 64 Gold, COP M6
DHR6 H 78	API 3 1/2" REG, box	54	6 400 Nm	4 720 lbf	COP 64 Gold, COP M6, COP M7

## Electrical system

Voltage	24 V
Batteries	2 x 12 V, 235 Ah
Alternator	28 V, 95 Ah
Work lights, LED type, front	4 x 4 200 Lumen
Work lights, LED type, rear	2 x 4 200 Lumen
Work lights, LED type, feed	2 x 4 200 Lumen
Warning lamp and reverse alarm	

## Aluminum feed

Aluminum profile feed with hose guide and double drill tube support with break-out table and movable lower guide/dust hood	Metric	US
Feed rate, max	0.9 m/s	177 ft/min
Feed force, max	40 kN	8 992 lbf
Tractive pull, max	50 kN	11 240 lbf
Feed motor size	2099 cc	0.6 US gal
Chain size	45 mm	1.8"
<b>Standard Feed</b>		
Feed extension	1 150 mm	45.3'
Travel length	5 400 mm	212.6'
Total length	9 400 mm	370'
<b>Long Feed</b>		
Feed extension	1 900 mm	74.8'
Travel length	7 540 mm	296.8'
Total length	11 600 mm	456.7'
<b>XL Feed</b>		
Feed extension	1 150 mm	45.3'
Travel length	8 500 mm	334.6'
Total length	12 400 mm	488'

## Dust collector

DCT 320 including pre-separator	Metric	US
Filter area	32 m²	344 sq.ft
Suction capacity at 500 mm wg	1 270 l/s	2 690 cfm
Suction hose diameter	203 mm	8"
Cleaning air pressure, max	8 bar	116 psi
Cleaning air consumption	2-4 l/pulse	0.06-0.12 cfm/pulse
Number of filter elements	32 pcs	

## Hydraulic system

<b>Hydraulic oil cooler</b>		
Max ambient temperature	55°C	131°F
<b>Pumps</b>		
Axial piston pump (1)	225 l/min	59.4 gal/min
Axial piston pump (2)	160 l/min	42.3 gal/min
Axial piston pump (3)	63 l/min	16.6 gal/min
Gear pump (4)	41 l/min	10.8 gal/min
Gear pump (5)	41 l/min	10.8 gal/min
<b>Return and drainage filters (2 x 3 filters)</b>		
Filtration rate	10 µm absolute	

## Engine

CAT C15, turbo-charged, diesel engine, Tier 4 Final /EU Stage 5 (multi-certified for US and EU markets) or Tier 3/stage IIIA	Metric	US
Power rating @ 1 800 rpm	354 kW	475 hp

## Compressor

Atlas Copco XRX 10, two stage screw type compressor	Metric	US
Working pressure, max	25 bar	363 psi
FAD at 25 bar	405 l/s	858 cfm

## Carrier

	Metric	US
Tramming speed, max/min	3.3/1.8 kph	2.0/1.1 mph
Traction force, max	138 kN	31 020 lbf
Ground clearance	405 mm	16"
Track oscillation	±10°	

## Volumes

	Metric	US
Hydraulic oil tank	120 l	31.7 gal
Hydraulic system, total	270 l	71.3 gal
Compressor oil	63 l	12 gal
Diesel engine oil	44 l	11.6 gal
Diesel engine, coolant, Tier 3	65 l	17 gal
Diesel engine, coolant, Tier 4	110 l	29 gal
Diesel engine, fuel tank	975 l	258 gal
Traction gear	3 l	0.8 gal
Lubrication tank (HECL)	40 l	10.6 gal
DEF fluid tank (Tier 4 final only)	34 l	9 gal

## Weight

Standard unit excluding all options and drill rods (OM)	Metric		US	
SmartROC D60 long feed	Tier 3 - 25 550 kg	Tier 4F Stage 5 - 25 800 kg	Tier 3 - 56 328 lb	Tier 4F Stage 5 - 56 879 lb
SmartROC D60 standard feed	Tier 3 - 24 900 kg	Tier 4F Stage 5 - 25 150 kg	Tier 3 - 54 895 lb	Tier 4F Stage 5 - 55 446 lb
SmartROC D60 XL feed	Tier 3 - 26 450 kg	Tier 4F Stage 5 - 26 700 kg	Tier 3 - 58 312 lb	Tier 4F Stage 5 - 58 863 lb

# Technical specifications

## Cabin

- ROPS and FOPS approved with rubber vibration dampers
- 2 x wipers with washer
- Clear laminated glass (front and roof windows)
- Clear toughened glass (side and rear windows)
- Fully adjustable, electrically heated operator seat
- Foot rest
- Cabin light
- Air conditioning/heating
- Rig inclination indicator
- Rear view mirror
- 24 V outlet socket
- Electric combined engine/inclination hole depth instrument

## Optional equipment

### Carrier

- Wide body kit
- Hydraulic support leg
- Protection hand rails on top of canopy
- Extra LED worklight package
- Heavy duty air intake filters for engine and compressor
- Combined warning sound and beacon
- Manual or automatic Ansul Checkfire 210 fire extinguisher system
- Electric fuel filling pump
- Fast fuel-filling system
- Diesel-driven engine pre-heater
- Insulated and heated compressor regulation system
- Arctic Fox -40°C cold start
- Battery sliding tray

### Water mist system

- Water mist system, pump, one or two 400 l water tanks
- Arctic-ready water mist system, pump, one or two 400 l water tanks

### Cabin

- 6 kg dry chemical fire extinguisher, type ABE class III
- Clear laminated glass (front and roof windows)
- Tinted toughened glass (side and rear windows)
- Sunshade kit
- Bluetooth audio system
- Reverse camera with display integrated into main display

### Feed

- Service winch with jib boom mounted on the feed
- Wide feed foot
- Protective guard, according to EN16228
- 35° pre-splitting boom system
- Reverse Circulation (RC)
- Screw sampler device
- Pre-split suction hood

### Lubrication

- Central lubrication system, type Lincoln
- Thread lubrication, spray system
- Artic hydraulic oil, VG 32
- Tropical hydraulic oil, VG 68
- Biological hydraulic oil, VG 46

### Hole and inclination systems

- Hole Navigation System
- GPS compass aiming unit
- Laser receiver

### Automation and software

- BenchREMOTE remote operator station
- Rig Remote Access
- Surface Manager Reporting
- Rig Access control
- Configurable safety software

### Parts and services products

- ROC Care


### Optional accessories

- Tool kit for rotary head with fixed spindle sub
- Tool kit for rotary head with floating spindle sub
- Lubrication kit
- RCS tool box


## Sound and vibration\*

Cabin: A-weighted Sound Pressure Level, LpA			79 dB
Cabin: Weighted whole body vibration level, a <sub>w</sub>			< 0.5 m/s²
A-weighted Sound Power Level, LwA			124 dB
A-weighted sound pressure level, LpA, calculated (distance from rig)			
10 m	96 dB	160 m	72 dB
20 m	90 dB	320 m	66 dB
40 m	84 dB	640 m	60 dB
80 m	78 dB	1280 m	54 dB


\* The declared noise emission values should be combined with a measurement uncertainty of KpA-6 dB. The sum of declared measured value and the uncertainty value represent an upper limit of the range, in which measured values are likely to be included. The values were determined in accordance with the standards ISO 3744:2010 (for sound power level estimation), ISO 11203:1995 (for sound pressure calculation at different distances from the rig), ISO 11201:2010 (for operator cabin sound pressure level) and ISO 2631-1 (for whole body vibration).

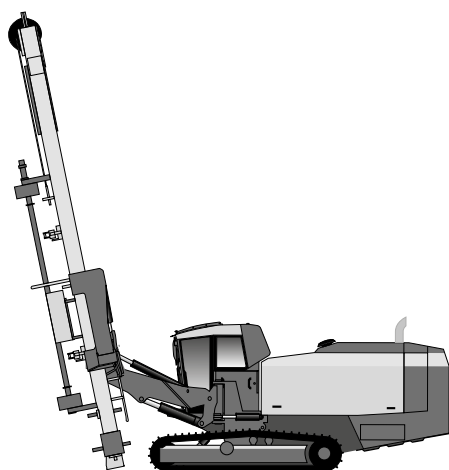


Horizontal body	
D60 XLF	15.5°
D60 LF	15°
D60 SF	22°

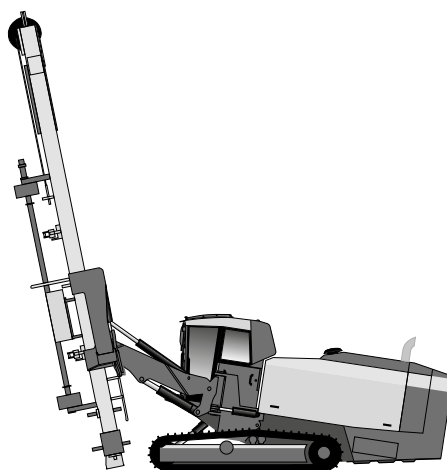


Backwards tilt body: 10°	
D60 XLF	20.5°
D60 LF	18°
D60 SF	25°

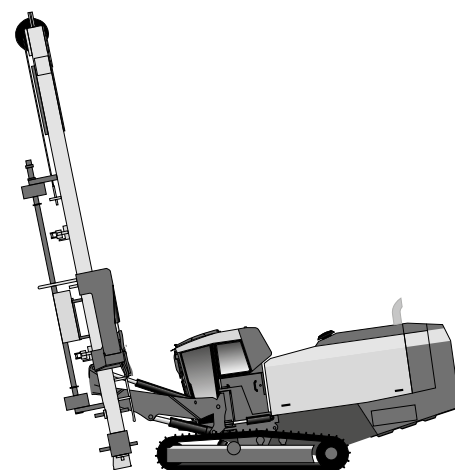

Front tilt body: 10°	
D60 XLF	11°
D60 LF	11°
D60 SF	20°

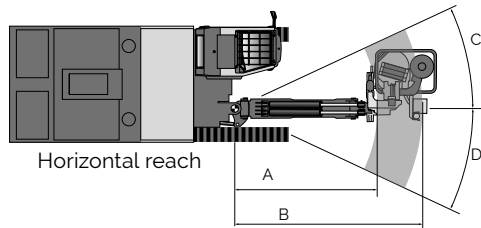


Horizontal reach (mm)	A	B	C	D
Standard feed	2 700	3 190	25°	25°
Long feed/XLF	2 577	3 075	17°	13°

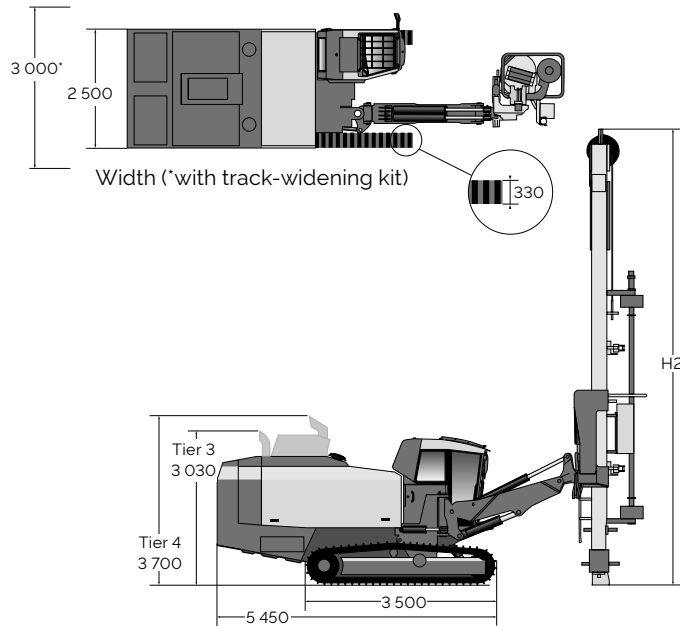


## Height and length

Long feed (LF) dumped		Metric	US
Height (H1)		3 500 mm	138°
Length (L1)		11 600 mm	457°
XL feed dumped			
Height (H1)		3 500 mm	138°
Length (L1)		12 400 mm	488°
Standard feed (SF) dumped			
Height (H1)		3 500 mm	138°
Length (L1)		9 300 mm	366°
Feed height (H2)			
Long feed (LF)		11 600 mm	457°
Standard feed (SF)		9 400 mm	370°
XL feed		12 400 mm	488°


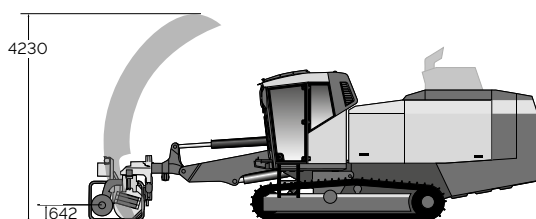


Toe-hole drilling (standard feed only)

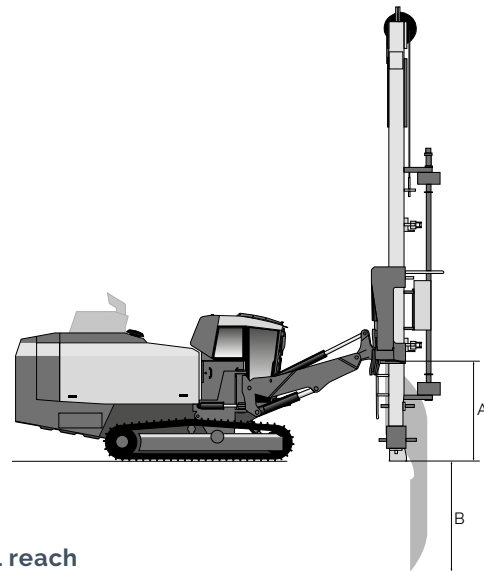


## Vertical reach

	A (Metric)	B (Metric)	A (US)	B (US)
Long feed	582 mm	2 277 mm	23°	90°
Standard feed	1 040 mm	2 659 mm	41°	105°
XL feed	672 mm	2 195 mm	26.4°	86.4°

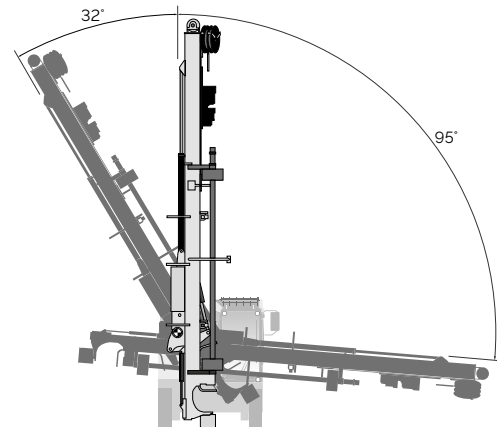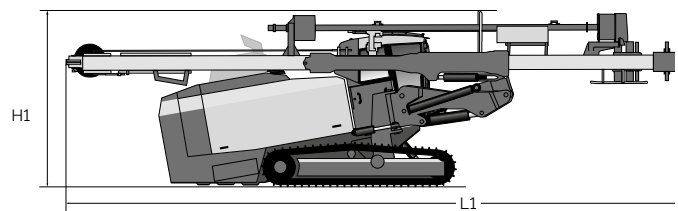

Feed swing angles - standard feed

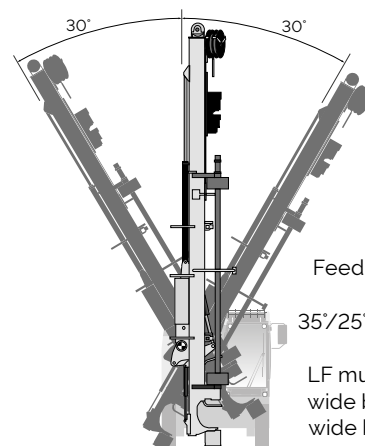

Feed swing angles - long feed/XL feed  
35°/25° with 35° pre-splitting boom system.  
LF must be equipped with wide body kit. XL feed has wide body kit as standard.





98681015401g 2023-06 Örebro, Sweden. Legal Notice © Copyright 2023 Epiroc Rock Drills AB, Örebro, Sweden. All product names in this publication are trademarks of Epiroc. Any unauthorized use or copying of the contents or any part thereof is prohibited. Illustrations and photos may show equipment with optional extras. No warranty is made regarding specifications or otherwise. Specifications and equipment are subject to change without notice. Consult your Epiroc Customer Center for specific information.

## United in performance. Inspired by innovation.

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow.  
**[epiroc.com](https://epiroc.com)**

